




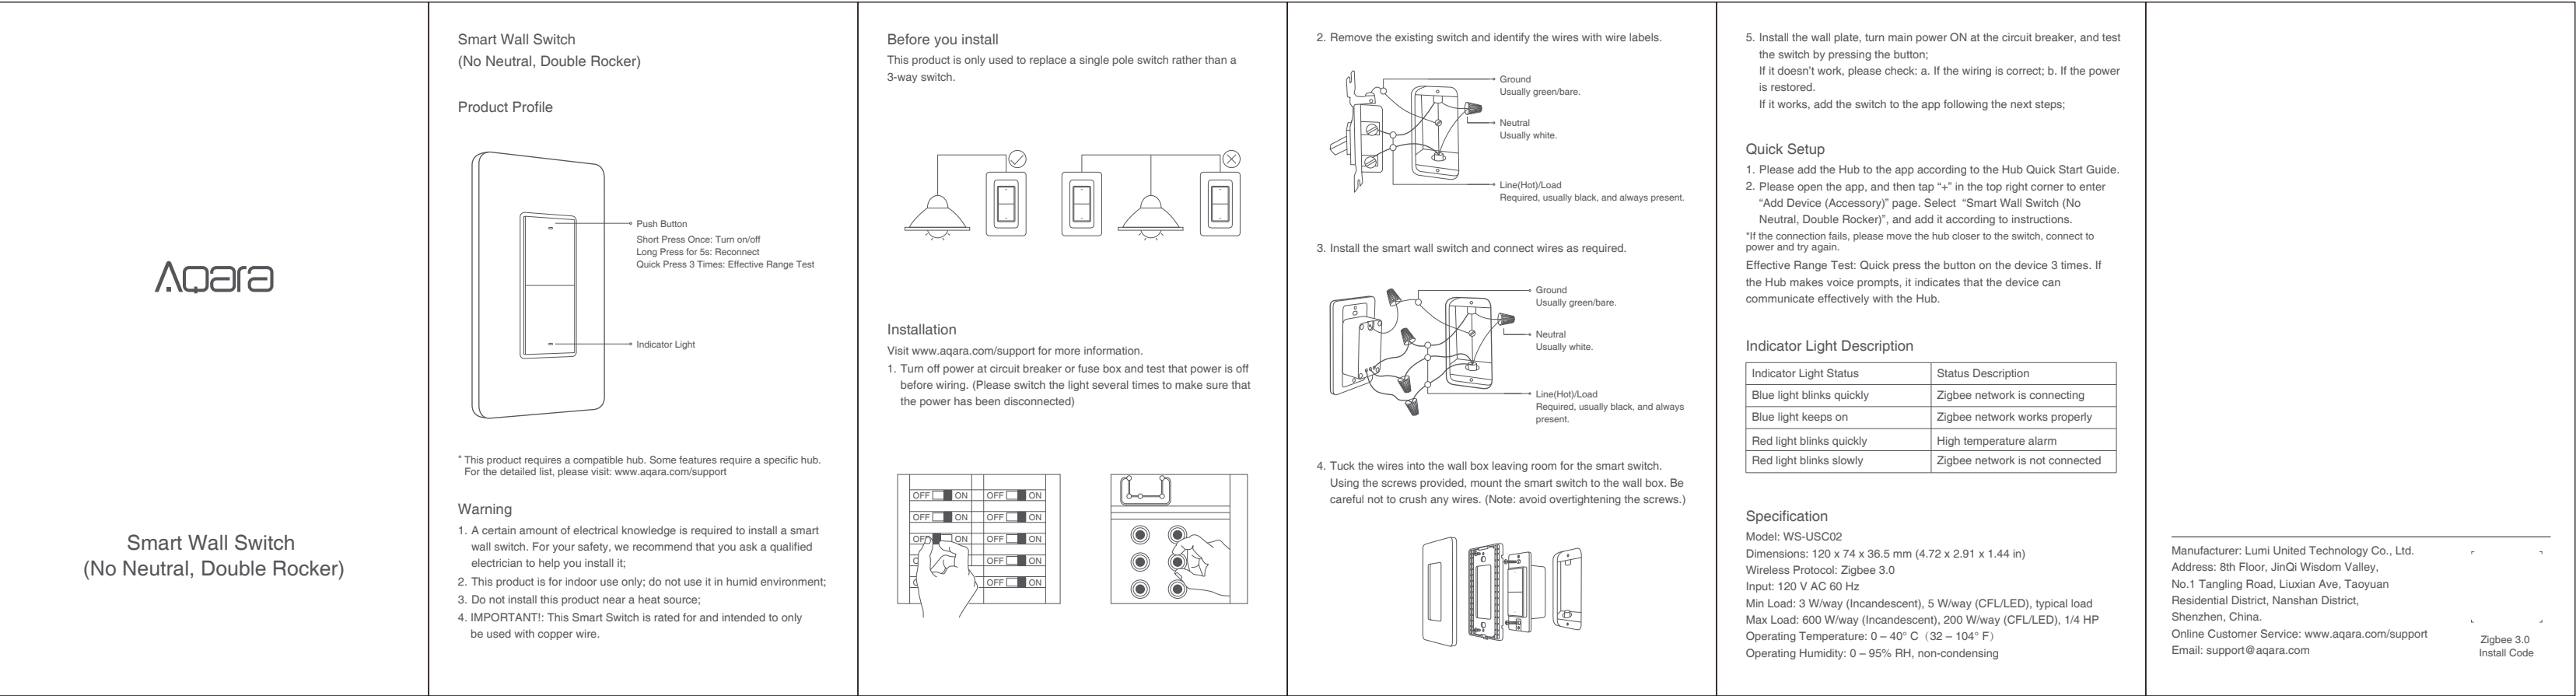

### Switch de pared inteligente

(sin neutro, basculante doble)

#### Perfil del producto

Botón  
Pulsación corta: encender/apagar  
Pulsación larga durante cinco segundos: volver a conectar  
Tres pulsaciones rápidas: prueba de alcance efectivo

Luz indicadora

\* Este producto debe utilizarse con un dispositivo con funcionalidad de puerta de enlace. Algunas funciones requieren compatibilidad con modelos de puerta de enlace específicos. Para una lista detallada, visite: www.aqara.com/support

#### Advertencia

- La instalación de un switch inteligente requiere ciertos conocimientos en materia de electricidad. Para su seguridad personal, se recomienda pedir ayuda a un electricista cualificado para la instalación.
- Este producto ha sido diseñado exclusivamente para uso en interiores; no lo utilice en un entorno húmedo.
- No instale el producto cerca de una fuente de calor.

### Antes de la instalación

Verifique la compatibilidad

Este producto solo puede sustituir switch de control sencillo en lugar de switches de doble control.

### Installation

Visitar en [www.aqara.com/support](#) para obtener más información.

- Desconecte la alimentación del switch que se vaya a sustituir antes de la instalación (apague y encienda la luz varias veces para comprobar que se ha desconectado la alimentación).

- Retire el switch que se vaya a sustituir y marque el cable con la etiqueta de cables para identificar el cable correspondiente en la instalación.
- Coloque la cubierta de superficie del switch, conecte la alimentación y controle con el botón; si el control no funciona, compruebe que las conexiones sean correctas y que se haya conectado la alimentación; si funciona, siga los pasos a continuación para agregar el producto.

### Configuración rápida

- Agregue el hub a la aplicación de acuerdo con la Guía rápida del hub.
- Abra la aplicación, pulse «+» en la parte superior derecha para acceder a la página «Add Device (Accessory)»: (Agregar dispositivo [accesorio]). Seleccione Switch de pared inteligente (sin neutro, basculante doble) y siga las instrucciones para agregarlo.

\*Si falla la conexión, acerque el switch de pared al hub, cóncetelo y vuelva a intentarlo.

Prueba de alcance efectivo: pulse rápidamente tres veces el botón en el accesorio. Si el hub emite un mensaje de voz, significa que el accesorio y el sensor se están comunicando correctamente.

### Descripción de la luz indicadora

| Estado de la luz indicadora        | Descripción del estado                           |
|------------------------------------|--------------------------------------------------|
| La luz azul parpadeará rápidamente | Se está estableciendo conexión con la red Zigbee |
| Luz azul fija                      | La red Zigbee funciona correctamente             |
| La luz roja parpadeará rápidamente | Alarma de alta temperatura                       |
| La luz roja parpadear lentamente   | No hay conexión con la red ZigBee                |

### Especificaciones

Modelo: WS-USC02

Dimensiones: 120 x 74 x 36,5 mm (4,72 x 2,91 x 1,44 pulgadas)

Protocolo inalámbrico: Zigbee 3.0

Entrada: 120 VCA, 60 Hz

Cargas mínimas: 3W/vía (incandescente), 5W/vía (CFL/LED), carga típica

Cargas máximas: 600W/vía (incandescente), 200W/vía (CFL/LED),  
1/4HP (total)

Temperatura de funcionamiento: 0 – 40° C (32 – 104° F)

Humedad de funcionamiento: 0 – 95% HR, sin condensación

### Fabricante:

Lumi United Technology Co., Ltd.

Dirección: 8th Floor, JinQi Wisdom Valley, No.1 Tangling Road, Liuxian Ave, Taoyuan Residential District, Nanshan District, Shenzhen, China.

Servicio de atención al cliente en línea: [www.aqara.com/support](#)

Correo electrónico: support@aqara.com

### FCC ID: 2AKIT-AK022

**Federal Communications Commission (FCC) compliance statement**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference.  
(2) This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

### IC: 22635-AK022

**IC NOTICE TO CANADIAN USERS**

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:  
(1) This device may not cause interference.  
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

### Régulation des interférences électromagnétiques

Cet appareil est conforme aux limites d'exposition aux rayonnements de la IC établies pour un environnement non contrôlé. Cet équipement doit être installé et fonctionner à au moins 20cm de distance d'un radiateur ou de votre corps.Cet émetteur ne doit pas être co-localisé ou fonctionner en conjonction avec une autre antenne ou un autre émetteur.

**Important Safety Instructions**

- The maximum ambient temperature during use of the appliance must not exceed 40° C.
- The appliance is suitable for moderate climates only.
- The appliance does not require much attention. If you want to clean it, please use only dry cloths or a brush.




**Consignes de sécurité importantes**

- La température ambiante maximale pendant l'utilisation de l'appareil ne doit pas dépasser 40° C.
- L'appareil est uniquement adapté aux climats modérés.
- L'appareil ne nécessite pas beaucoup d'attention. Si vous souhaitez le nettoyer, utilisez uniquement des chiffons secs ou une brosse.




\* Este producto debe utilizarse con un dispositivo con funcionalidad de puerta de enlace. Algunas funciones requieren compatibilidad con modelos de puerta de enlace específicos. Para una lista detallada, visite: [www.aqara.com/support](http://www.aqara.com/support)

1. La instalación de un switch inteligente requiere ciertos conocimientos en materia de electricidad. Para su seguridad personal, se recomienda pedir ayuda a un electricista cualificado para la instalación.
2. Este producto ha sido diseñado exclusivamente para uso en interiores; no lo utilice en un entorno húmedo.
3. No instale el producto cerca de una fuente de calor.


Verifique la compatibilidad  
Este producto solo puede sustituir switch de control sencillo en lugar de  
switches de doble control.



1. Turn off power at circuit breaker or fuse box and test that power is off before wiring. (Please switch the light several times to make sure that the power has been disconnected)

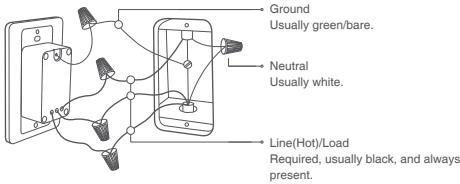

4. Tuck the wires into the wall box leaving room for the smart switch. Using the screws provided, mount the smart switch to the wall box. Be careful not to crush any wires. (Note: avoid overtightening the screws.)



1. Please add the Hub to the app according to the Hub Quick Start Guide.
2. Please open the app, and then tap "+" in the top right corner to enter "Add Device (Accessory)" page. Select "Smart Wall Switch (No Neutral, Double Rocker)", and add it according to instructions.

\*If the connection fails, please move the hub closer to the switch, connect to power and try again.

**Effective Range Test:** Quick press the button on the device 3 times. If the Hub makes voice prompts, it indicates that the device can communicate effectively with the Hub.

| Indicator Light Status    | Status Description              |
|---------------------------|---------------------------------|
| Blue light blinks quickly | Zigbee network is connecting    |
| Blue light keeps on       | Zigbee network works properly   |
| Red light blinks quickly  | High temperature alarm          |
| Red light blinks slowly   | Zigbee network is not connected |

Model: WS-USC02  
Dimensions: 120 x 74 x 36.5 mm (4.72 x 2.91 x 1.44 in)  
Wireless Protocol: Zigbee 3.0  
Input: 120 V AC 60 Hz  
Min Load: 3 W/way (Incandescent), 5 W/way (CFL/LED), typical load  
Max Load: 600 W/way (Incandescent), 200 W/way (CFL/LED), 1/4 HP  
Operating Temperature: 0 – 40° C (32 – 104° F)  
Operating Humidity: 0 – 95% RH, non-condensing

Manufacturer: Lumi Uni Technology Co., Ltd.  
Address: 8th Floor, JinQi Wisdom Valley,  
No.1 Tangling Road, Liuxian Ave, Taoyuan  
Residential District, Nanshan District,  
Shenzhen, China.  
Online Customer Service: [www.aqara.com/support](http://www.aqara.com/support)  
Email: [support@aqara.com](mailto:support@aqara.com)